

Category:


Installation system FUS

Product:

Channel nut PFCN 41, Art.No: 533739



Dimensions:

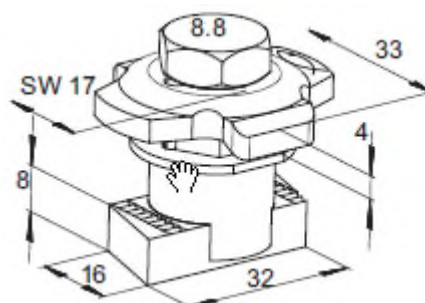

Description:

Fast connecting nut fitting to the FUS channel.

PFCN 41 suitable for connecting channel and fittings

Easy and precise positioning in the channel.

Serration for secure hold in the FUS channel.

Properties:

Material:

Screw: M10, 8.8, DIN 933

Sliding nut: S420MC acc. EN 10149-2


Washer: Steel DD11 - EN 10111

Plastic: Polypropylene

Zinc plating:

Electro zinc plated acc. to DIN 50979, min. 8 µm

Loads:



Note: Load values are based on the PFCN 41 push-through connector.

Item	Art.-No.	Max. recommended tension load for FUS 1,5 mm [kN]	Max. recommended tension load for FUS 2,0mm N _{rec} [kN]	Max. recommended tension load for FUS 2,5mm N _{rec} [kN]	Max. recommended shear load for FUS 1,5 mm [kN]	Max. recommended shear load for FUS 2,0 mm [kN]	Max. recommended shear load for FUS 2,5 mm [kN]	Tightening torque for screw grade ≥ 8.8 T _{inst} [Nm]
PFCN 41	533739	4,0	5,0	7,0	4,0	4,5	5,0	40

Installation: (Example)

